# RF4016I4

## IR-detektor 433 Mhz. Täckningsområde 16 m i 9 ridåer. Räckvidd 150 m i öppen terräng. Sänder larm, sabotage, låg batterispänning

### One way transmitter

The sensor has a chip tuned wireless transmitter that communicates with any 433-63 bit legacy receiver.
The learn-in process of the sensor is identical to the process used with legacy sensors.
Each sensor reports a unique ID code with each transmission.
The sensor also reports the battery and transmitter condition (supervisory signal) to the panel every 18 minutes.

### Mirror power

The patented optical mirror technology gives the advantage of gliding focus, which creates a volumetric detection curtain from floor level up to installation height resulting in a sensor that never loses track of the object.
In these series we are using a dual element digital pyro generating 2 volumetric curtains for each of the 9 curtain sets.

### 5D signal processing

The unique 5D signal processing technology will look for a match in shape, size, speed, duration and environment to decide on an alarm condition.
The result is a unique combination of high detection sensitivity with high false alarm immunity.

### Ease and flexibility of installation

1.Easy opening and closing system.
2.Easy access when changing the batteries.
3.Easy access to the mirror optics.
4.Tolerates wall angle deviation and different mounting heights.
5.Limited loss of coverage when objects are placed in the field of the PIR vision.
6. One mounting plate for all sensors in the series.

### Other members of the family

This family includes motion sensors with variants in detection ranges and a Pet Immune variant.
The consistent family aesthetics between the various models ensure a professional approach when installing different sensor types.



### Detaljer

- Proven mirror optics inside to get a dense coverage pattern
- Selectable coverage pattern using mirror masks
- Full under crawl detection
- "5D" signal processing for false alarm immunity
- Auto focus with constant range sensitivity
- No adjustment required for different mounting heights
- Tolerates wall angle deviation
- End-user friendly product design for exchanging batteries
- 5-years battery life with 1 battery

# RF4016I4

## IR-detektor 433 Mhz. Täckningsområde 16 m i 9 ridåer. Räckvidd 150 m i öppen terräng. Sänder larm, sabotage, låg batterispänning

## Tekniska specifikationer

### General

| | |
|---|---|
| Technology | PIR |
| Application type | Montaggio a parete |
| Anti masking | No |
| Pet immune | No |
| Camera | No |

### Detection

| | |
|---|---|
| Max. detection range | 16 m |

### Wired/wireless

| | |
|---|---|
| Wired-wireless | Trådløs |
| Wireless frequency | 433 MHz attuale |
| Open-air range | 300 m |

### Electrical


| | |
|---|---|
| Battery lifetime | 5 anni |

### Physical

| | |
|---|---|
| Mounting height | 2.3 to 3 m |

### Environmental

| | |
|---|---|
| Environment | Indendør |

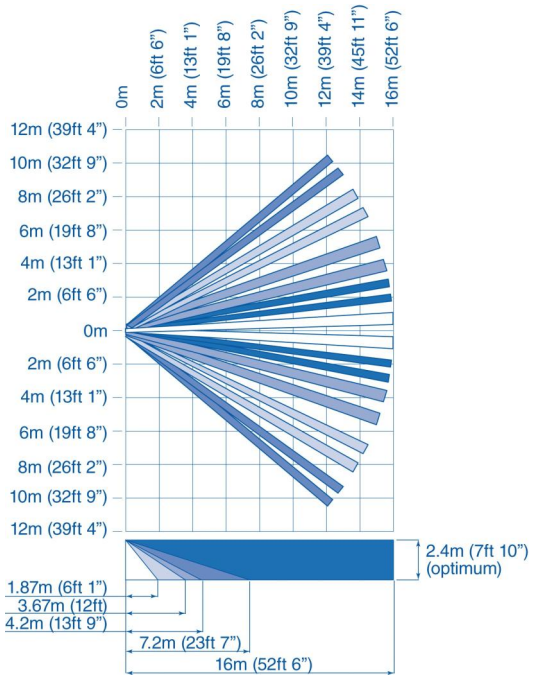


Kidde Global Solutions förbehåller sig rätten att ändra produktspecifikationer utan föregående meddelande. För de senaste produktspecifikationerna, besök se.firesecurityproducts.com online eller kontakta din försäljningsrepresentant.

Last updated on 12 November 2026 - 18:57