VE736AM

PIR/AM Detector with 11 curtains & 1 curtain of 20 m & 60 m CO Relay



VE736AM

PIR/AM Detector with 11 curtains & 1 curtain of 20 m & 60 m CO Relay

Technische specificaties

General

Technology	PIR
Application type	Fixation murale
Anti masking	Yes
Pet immune	No
Camera	No
Signal processing	Vector Verified Enhanced (VE2)
Pry-off tamper kit	Embarqué

Detection

Max. detection range	60 m
Detection range	60 m
Undercrawl protection	Yes
Alarm memory	Yes
Alarm time	3 secondes

Wired/wireless

Wired-wireless	Kablede

Inputs/outputs

Remote control lines	Jour/Nuit, Test de fonctionnement

Physical

Colour	Hvid
Mounting height	1.8 à 3 m

Environmental

Environment	Indendør

Regulatory

EN50131 grade	Lønklasse 3
Certification	VdS

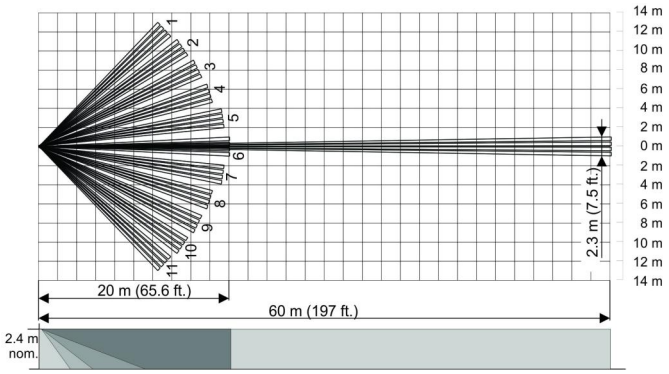

Als een bedrijf van innovatie behoudt Kidde Global Solutions zich het recht voor productspecificaties zonder kennisgeving te wijzigen. Ga voor de nieuwste productspecificaties online naar be.firesecurityproducts.com of neem contact op met uw verkoopvertegenwoordiger.

Last updated on 12 November 2026 - 18:57