
ATS4500AV-IP-MBC

Advisor Advanced 4500AV IP, VdS Zentralenplatine

Allgemein

VdS Zentralenplatine zum Austausch für Advisor Advanced
ATS4500AV-IP Zentrale

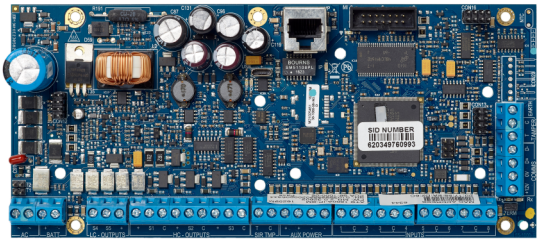

ATS4500AV-IP-MBC

Advisor Advanced 4500AV IP, VdS Zentralenplatine

Technische Spezifikationen

System

Product line	Advisor Advanced
Product type	Integrierte Zugangskontrolle
Panel type	Hybrid
Kit	No
No. of keypads / readers	32
Data Gathering Panels (DGP)	30
No. of alarm groups	128
Specified cable	WCAT 52/54 oder vergleichbar

Inputs

Max no. of inputs	512
Onboard inputs	8
Inputs plug-in expansion	8

Outputs

No. of outputs	128
No. of onboard outputs	5

Area

No. of areas	64

User/Cards

Max. no. of users	more than 2000
Users with name	2000
Max. no. of cards	2000 - 65532
Max. no. of PIN codes	2000 - 65532

Access control

Standard doors on control panel	16
Door groups	128

Communication

Onboard transmission type	IP
Transmission extension	GSM, GSM/GPRS, GSM/GPRS/IP, PSTN
Databus type	RS485

Event log

Alarm event log	14500
Access event log	10000

Electrical

Mainboard current consumption	150 mA
Max system current	2500 mA
Max aux power current	1000 mA
Auto-reset fuses	5

Physical

Physical dimensions	202 x 90 x 40 mm
Housing	Brak mieszkań

Environmental

Operating temperature	-10 bis +55°C
Relative humidity	95% nicht kondensierend

Regulatory

Compliancy	CE
Certification	CE, VdS

Als innovatives Unternehmen behält sich Kidde Global Solutions das Recht vor, Produktspezifikationen ohne Ankündigungen zu ändern. Für die aktuellsten Produktspezifikationen, besuchen Sie bitte de.firesecurityproducts.com online oder kontaktieren Sie bitte unsere Vertriebsmitarbeiter.