# 178601

## ZP755W-2R Weatherproof Sounder (RED)

### General

The ZP755W-2R is an addressable, weatherproof sounder designed for use on ZP7 compatible addressable fire detection and alarm systems. The sounder is developed for outdoor applications or for use in areas where the ingress of water can be expected e.g. where hygiene requirements demand regular washing of the protected area.

Installed onto and powered by the detection loop, the ZP755 series gives the system designer the flexibility to offer a complete addressable system on 2 wires. Installation costs are thereby greatly reduced whilst system integrity, sounder options and programmed alarm organisation are maintained.

### Self Test

The high efficiency acoustic design together with a low energy 'sound gun' transducer provides a forward sound dispersion with an output of up to 95 dB(A). A volume control is included for areas where a reduced sound output is required. The volume control can limit the sound output by up to 75% of the full output volume.

The ZP755 series features a unique self test facility which is automatically activated during sounder testing. A built in microphone measures the SPL and automatically flags the sounder address and location to the control panel should volume fall below the expected test level.

### Flexibility

In systems with long loop lengths or high current requirements, ZP755 sounders may be powered from an external power supply. All ZP755 sounders incorporate switch settings enabling them to be assigned a unique address which is polled by the panel every 2 seconds. Continuous, intermittent and two-tone outputs are available from which any combination can be chosen to provide alert and evacuate, two stage alarms. All sound types comply with BS5839 Part 1 recommended frequencies.

Sounder enclosures are of molded, high impact, red thermoplastic designed for surface wiring.



### Details

- IP33C rated for outdoor applications
- User configurable tone selection facilitates alarm differentiation
- 90 dB(A) sound pressure output levels for wide application coverage
- Automatic self test facility ensuring that the device is always operational
- High efficiency sound gun transducer ensures low current consumption for better power distribution and loop loading
- EN54:3 approved and CPR certified

# 178601
## ZP755W-2R Weatherproof Sounder (RED)

## Technical specifications

### General

| | |
|---|---|
| Wireless frequency | 10 GHz |
| Compatibility | ZP7 series addressable systems |
| Line monitoring | Open & short circuit, sound output, presence, type |
| Addressing method | Mikroprzełączniki |
| Devices per loop (max) | 50 (1 km loop of 1.5 mm² cable, 50 m to first device) |
| Addressing method | 7 way dipswitch |

### Electrical

| | |
|---|---|
| Operating voltage | 19.5 to 20.5 V (Loop powered)<br>18 to 30 VDC (Externally powered) |
| Current consumption | 820 µA (Quiescent when loop powered)<br>6.4 mA (Active when loop powered)<br>470 µA (Quiescent when externally powered)<br>500 µA (Active when externally powered) |
| Cable size | 1.5 mm² |

### Sounder

| | |
|---|---|
| Output level | 90 dB(A) (Tone dependent) |
| Output level adjustment | Yes |
| Selectable tones | Yes |
| Synchronization | Yes |

### Physical


| | |
|---|---|
| Physical dimensions | 120 x 150 mm (Ø x H) |
| Net weight | 610 g |
| Colour | Rød |
| Mounting type | Loftmontering, Vægmontering |
| Material | Støbt termoplast |

### Environmental

| | |
|---|---|
| Vandal proof | No |
| Operating temperature | -25 to +70°C |
| Storage temperature | -25 to +70°C |
| Relative humidity | 10 to 95% noncondensing |
| Environment | Udendørs |
| IP rating | IP33C |

### Regulatory

| | |
|---|---|
| Compliancy | CE, REACH, RoHS 2, WEEE |
| Certification | CPR |
| Standards | EN54-3 |

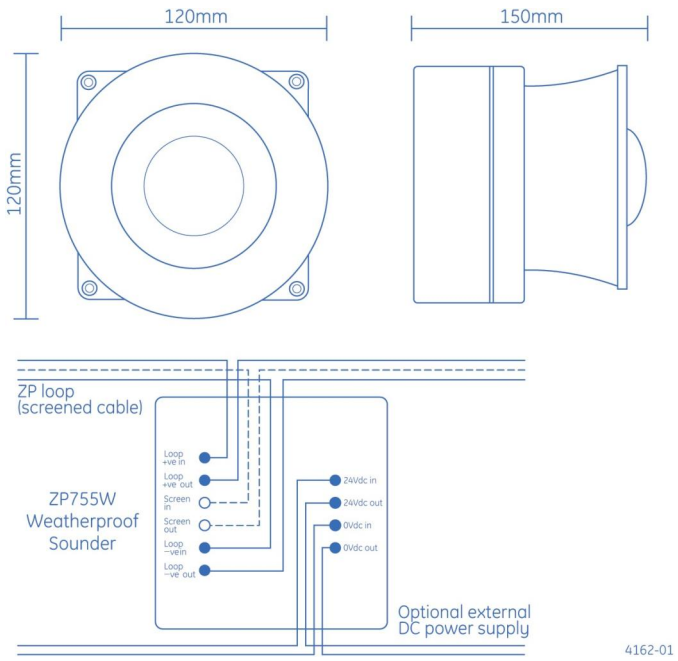


KIDDE COMMERCIAL

As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 16 October 2026 - 11:30