9-30438

Hochiki Addressable Panel Interface Card (APIC)

Description

The 9-30438 is an interface which can be attached directly onto the main control board of any of the AirSense aspirating detectors. The card plugs into the main control board inside the detector enclosure. The board enables the detector to be directly addressed and communicate with the main fire control panel via the Hochiki protocol.

Plug in terminals

Detectors are wired onto the loop using plug in terminals located on the detector main control board. The detector and interface are easily addressed by switch settings prominently positioned on the card.

Single address and multi address modes

The Hochiki APIC has two distinct modes of operation; single address and multi address. When the interface is set to single address mode the card appears at a single address on the Hochiki loop and the detector status is read from that address. Multi address mode is used when monitoring the status of multiple detectors with consecutive addresses from a single Hochiki card. Multi address mode is normally only used in the Command Module.

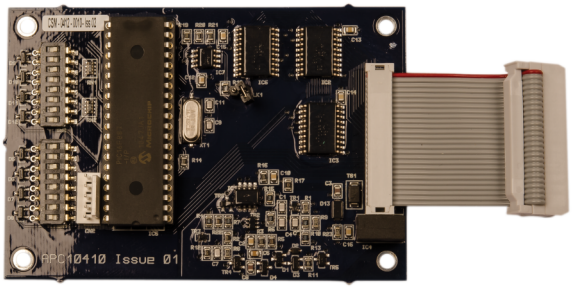

Details

- Simple addressing onto the addressable loop
- Ribbon cable connection – no hard wiring
- Piggy backs onto detector main board
- Ease of address setting

9-30438
Hochiki Addressable Panel Interface Card (APIC)

Technical specifications

General

Compatibility	Hochiki protocol

Physical

Physical dimensions	100 x 70 mm (W x H) (PCB)
Mounting type	Montagem em PCB, Wtykowe
Mounting	Ribbon cable with plug and socket - fixes to allotted space on panel main board. (by 3 M4 x 18mm stand off spacers)

Environmental

Operating temperature	-10 to +60ºC
Relative humidity	0 to 90% noncondensing
Environment	Indendør

Regulatory

Certification	EN54-20

As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 28 July 2025 - 15:17