SMA-LP-MULTI

MA SIGMA Lite Plus - Multi, 2.8 inch QVGA touchscreen, Multi-factor Bio/Card, MIFARE/MIFARE Plus/DESFIRE, IP65, 500 users, CE



SMA-LP-MULTI

MA SIGMA Lite Plus - Multi, 2.8 inch QVGA touchscreen, Multi-factor Bio/Card, MIFARE/MIFARE Plus/DESFIRE, IP65, 500 users, CE

Specifiche tecniche

System

RTE (Request To Exit)	No
CSN (Card Serial Number)	Yes
Custom data model	Yes

Technology

Reader type	Biometrico
Reader operating-transmitting frequency	13.56 MHz
Supported technology 13.56 MHz	MIFARE Classic (CSN), MIFARE Classic (données personnalisées), MIFARE, DESFire (CSN), MIFARE, DESFire EV1 (CSN), MIFARE DESFire EV1 (données personnalisées), Mifare DESFire EV2 (CSN), MIFARE Plus (CSN), MIFARE Plus (CSN, niveaux 1 et 3), NFC (CSN)
SAM module embedded	No

Biometric

Biometric type	Empreinte digitale
Biometric sensor type	Ottica

Interface & connections

Interface	Ethernet, OSDP V2, OSDP V2 canal sécurisé, RS-485, USB, Wiegand
Connector type	Netværk, Svinesvans

Tamper type

Pry-off tamper	No
Opening tamper	Yes

Operation

Stand-alone	Yes
PIN keypad	Yes

Electrical

Power supply type	PoE ind

Physical

Colour	Sort
Material	Polycarbonat
Form factor	Overdimensioneret
Mounting type	Montaggio a superficie

Environmental

Vandal proof	No
Environment	Udendørs

Regulatory

Compliancy	CE, FCC, ICASA, REACH, RoHS, UL 294, WEEE

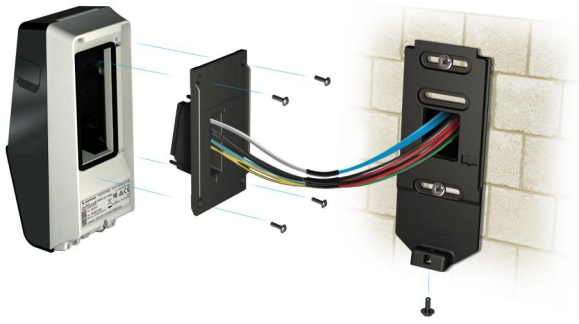

In quanto azienda in continua innovazione, Kidde Global Solutions si riserva il diritto di modificare le specifiche del prodotto senza preavviso. Per avere informazioni sempre aggiornate, visita it.firesecurityproducts.com online o contatta il tuo riferimento commerciale.

Last updated on 12 November 2026 - 18:57