
ATS1210E

8-16 zone DGP input expander, small plastic housing, EN50131 Grade 3 Class II

Product overview

The ATS1210E and ATS1211E expander offers 8 standard inputs and 8 Open Collector (OC) outputs. The expanders allow to increase the inputs and outputs of an Advisor Advanced control panel or CDC4 series door/lift controller. The ATS1210E is provided in a small plastic enclosure (ATS1644) and the ATS1211E in a small metal enclosure (ATS1643).

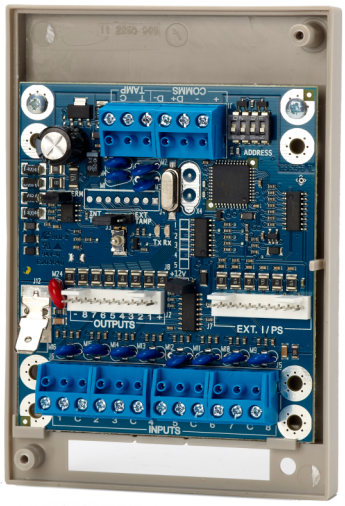

Expanders

Expanders are used to expand the number of alarm inputs in an Advisor Advanced system. Expanders allow inputs and outputs/relays to be connected at a location remote from an Advisor Advanced panel. Expanders communicate via poll & reply messages. Detectors, door contacts and other detection devices are connected to expanders that report any change of state to the control panel for processing. Available expanders include support for conventional devices, wireless devices as well as intelligent addressable devices. A special expander is available providing expansion of four to eight intelligent doors or lifts.

System databus connection

The system databus is used to connect expanders as well as keypads and readers (RASs) to the Advisor Advanced control panel. Remote devices can be up to 1.5 km from a control panels when using the preferred wiring and cable types. Keypads, readers and expanders have to be connected via a 2 pair twisted and shielded data cable to the system databus connection to achieve this. (WCAT52 is recommended). Daisy chain is the preferred wiring method. The shield of the data cable should be connected to earth at the control panel and should be left disconnected at any other end.

Functionality

Expanders provide information from remote locations to Advisor Advanced control panels in structured records. Data collected ranges from a wired input state to wireless or addressable device dates to a door state.

Bus devices communicate with the control panel. If a failure in communication occurs, the expander remembers the last alarm in a system preventing loss of an alarm due to a short interruption in data communication.

Up to 15 or 30 expanders can be connected to an Advisor Advanced depending on the variant.

Details

- 8 inputs on board
- 8 OC outputs on board
- Compatible with Axon and Advisor Advanced panels
- ATS1644 plastic enclosure with tamper protection
- EN50131 Grade 3
- PD6662:2010

ATS1210E

8-16 zone DGP input expander, small plastic housing, EN50131 Grade 3 Class II

Technical specifications

General

Expander type	Eingabe Expander
Product line	Advisor Advanced, ATS Master, Axon
Connection type	Databus connection
Compatibility	Axon, Advisor Advanced and Advisor Master
Max. distance from panel	1.5 km
Max. per panel	15 / 30 (depending on panel type)
Specified cable	WCAT52 / WCAT54 or equivalent

System

Addressing	Dip-Schalter
End-of-line resistor	Selectable

Inputs

Total	8
Onboard	8

Outputs

Total	8
Onboard	8
Type of outputs	Open Collector

Electrical

Operating voltage	10.5 to 13.8 VDC
Current consumption	53 mA
Integrated power supply	No

Physical

Physical dimensions	86 x 125 x 36 mm
Net weight	190 gr
Material	ABS
Housing	Small plastic

Environmental

Operating temperature	-10 to +55°C
Relative humidity	95% noncondensing
Environment	EN50130-5 ; Klasse II - Indoor (allgemein)
IP rating	IP30

Regulatory

Compliancy	CE
Certification	EN50131 Grad 3, VdS

As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 22 July 2026 - 17:02