FAC350

Conventional VAD, Shallow base, Ceiling mount - RED with RED flash



Details

- Automatic syncronisation
- Anti-Tamper locking mechanism
- Shallow mouting base
- Wiring directly to base
- Flash rate selectable

FAC350

Conventional VAD, Shallow base, Ceiling mount - RED with RED flash

Technische specificaties

Electrical

Current consumption	20mA @ 0.5 Hz / 40mA @ 1 Hz

Physical


Net weight	215 g
Colour	Rød
Material	Hög slagtålighet polykarbonat

Environmental

Operating temperature	-25 to +70°C
Relative humidity	5 to 95%
Environment	Indendør
IP rating	IP21

Regulatory

Certification	EN54-23

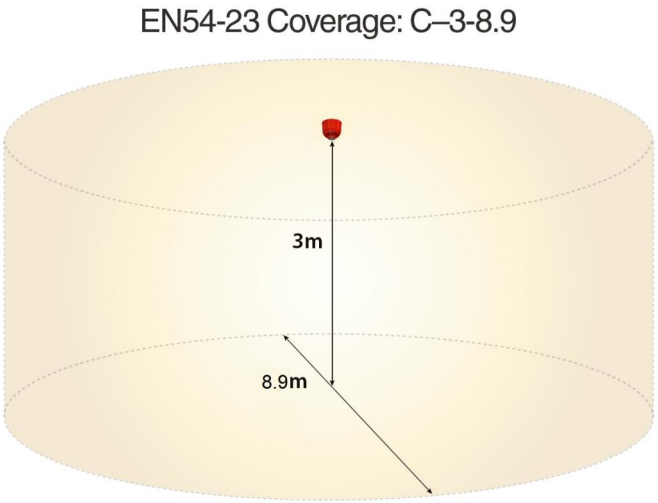

Als een bedrijf van innovatie behoudt Kidde Global Solutions zich het recht voor productspecificaties zonder kennisgeving te wijzigen. Ga voor de nieuwste productspecificaties online naar be.firesecurityproducts.com of neem contact op met uw verkoopvertegenwoordiger.

Last updated on 12 November 2026 - 18:57